

JointFast® is a quick setting joint compound

INSTRUCTIONS FOR USE

PREPARATION

- Ensure Paving is Level and properly laid on its foundation.
- If the base is not permeable then the joints may eventually fail.
- Before applying ensure joint area is completely dry and free of contaminants such as oil and grease etc.
- Apply the JointFast® within a temperature range of +8C to 25C.
- JointFast® is not suitable for block paving, drives or trafficked areas.
- Ensure that there is enough time to complete application as opening the bag will start the curing process.

APPLICATION

When satisfied of the above conditions empty the bag onto a plastic sheet or board and using a soft brush work the bag contents into the joints until the joint is evenly filled.

Once the joint is full compact the Joint-Fast with a tool or piece of wood across the appropriate width of the joint. (Failure to do this might affect the products performance when set).

Once the joints are compacted, lightly spray water across the joints with either a water-in can or a light spray from a hose pipe.


While the product will set within 30 minutes it is advised to keep away from the pathway for up to 24 hours to allow the product to gain strength in the joint and in order to assist the curing process it is advised to cover the joints with plastic sheeting of some type for the first 24 hour period.

Once the plastic sheeting is removed there may be some darkening of the paving (similar to dampness from rain) however your paving will soon return to its natural appearance after approximately 10 days.

Do not use power assisted cleaning tools on your pathway for at least 14 days.

MAINTENANCE

After a minimum two week period of time clean by brushing and then with a pressure washer if necessary (ensuring a minimum distance of 20cm between the washer nozzle and surface using a fan spray).

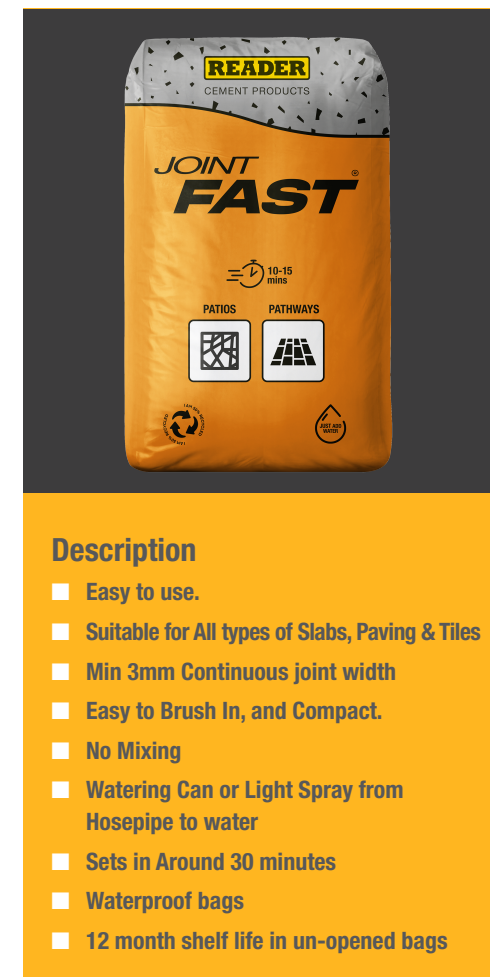

Description

- Easy to use.
- Suitable for All types of Slabs, Paving & Tiles
- Min 3mm Continuous joint width
- Easy to Brush In, and Compact.
- No Mixing
- Watering Can or Light Spray from Hosepipe to water
- Sets in Around 30 minutes
- Waterproof bags
- 12 month shelf life in un-opened bags

Reader Cement Products Ltd.

Kirkby Lane, Pinxton, Nottinghamshire, NG16 6HX, United Kingdom.

T: +44 (0)1623 518 350 E: info@reader.co.uk W: reader.co.uk

Issued January 2024 – Replaces all previous versions

Danger

Causes serious eye damage
Causes skin irritation

May cause allergic skin reaction
May cause respiratory irritation

